

(12) PATENT APPLICATION PUBLICATION

(19) INDIA

(22) Date of filing of Application: 07.12.2004

(21) Application No.: 01875/KOLNP/2004

(43) Publication Date: 21/07/2006

A

(54) Title of the invention: MULTIMEDIA SERVICE PROVIDING METHOD IN A RADIO MOBILE COMMUNICATION SYSTEM

(51) International classification : H04B 7/26
(31) Priority Document No : 10-2002-0035179
(32) Priority Date : 22.06.2002
(33) Name of priority country : REPUBLIC OF KOREA
(86) International Application No and Filing Date : PCT/KR03/001228 : 23.06.2003
(87) International Publication No : WO 04/002021
(61) Patent of addition to Application No : NIL
Filed on : NIL
(62) Divisional to Application No : NIL
Filed on : NIL

(71) Name of Applicant: LG ELECTRONICS INC.
Address of the Applicant: 20, YOIDO-DONG,
YOUNGDUNGPO-GU, SEOUL 150-010,
REPUBLIC OF KOREA

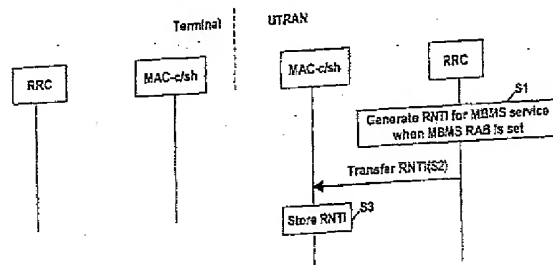
(72) Name of the Inventor: YI SEUNG-JUNE; LEE
YOUNG-DAE; LEE SO-YOUNG

Filed U/S 5(2) before The Patents (Amendment)

Act, 2005: NO

(57) Abstract:

A multimedia broadcast/multicast service (MBMS) in an universal mobile telecommunications systems (UMTS) is disclosed. When UTRAN provides an MBMS service, MBMS service-related information is exchanged between UTRAN and a terminal or between nodes in UTRAN by using MBMS RNTI so that a user group receiving MBMS data or a data of a specific MBMS service can be identified.



(FIG. 3)

(19) World Intellectual Property
Organization
International Bureau



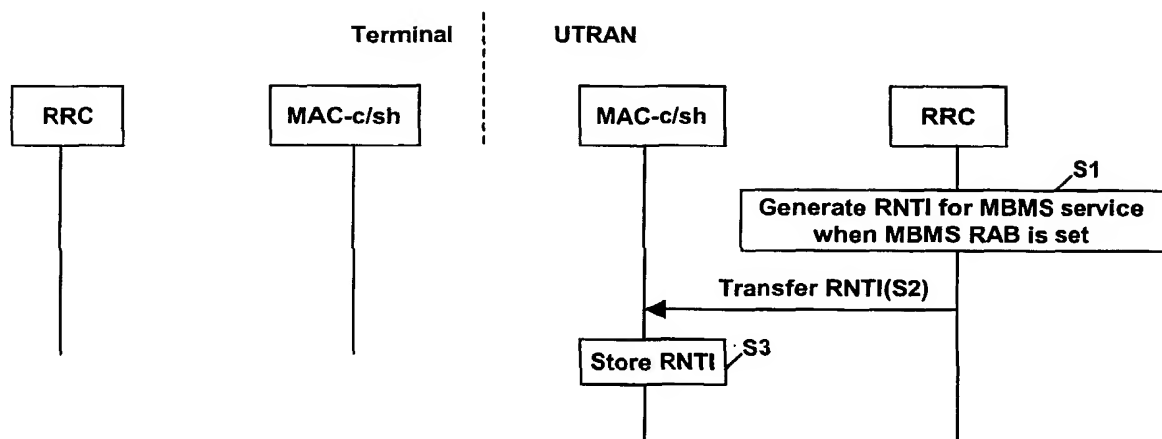
(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/002021 A1

- (51) International Patent Classification⁷: **H04B 7/26**
- (21) International Application Number:
PCT/KR2003/001228
- (22) International Filing Date: 23 June 2003 (23.06.2003)
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:
10-2002-0035179 22 June 2002 (22.06.2002) KR
- (71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, Seoul 150-010 (KR).
- (72) Inventors: **YI, Seung-June**; Daechung Apt. 303-403, Gaepo-Dong, Gangnam-Gu, Seoul 135-240 (KR). **LEE, Young-Dae**; Sinan Apt. 419-1501, Changwoo-Dong, Hanam, Gyunggi-Do 465-711 (KR). **LEE, So-Young**; Twekye 2nd Apt. 366-702, Okeum-Dong, Gunpo, Gyunggi-Do 435-050 (KR).
- (74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, Seoul 135-010 (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MULTIMEDIA SERVICE PROVIDING METHOD IN A RADIO MOBILE COMMUNICATION SYSTEM



(57) Abstract: A multimedia broadcast/multicast service (MBMS) in an universal mobile telecommunications systems (UMTS) is disclosed. When UTRAN provides an MBMS service, MBMS service-related information is exchanged between UTRAN and a terminal or between nodes in UTRAN by using MBMS RNTI so that a user group receiving MBMS data or a data of a specific MBMS service can be identified.

WO 2004/002021 A1

MULTIMEDIA SERVICE PROVIDING METHOD IN A RADIO MOBILE COMMUNICATION SYSTEM

TECHNICAL FIELD.

5

The present invention relates to a multimedia broadcast/multicast service (MBMS) of a universal mobile telecommunications system (UMTS) and, more particularly, to a multimedia service providing method for providing an MBMS service by using a radio network temporary identifier (RNTI).

10

BACKGROUND ART

A universal mobile telecommunications system (UMTS) is a third generation mobile communication system that has evolved from a standard known as Global System for Mobile communications (GSM). This standard is
15 a European standard which aims to provide an improved mobile communication service based on a GSM core network and wideband code division multiple access (W-CDMA) technology.

Figure 1 illustrates an example of the construction of a general UMTS network.

20 As shown in Figure 1, the UMTS is roughly divided into a terminal, a UTRAN and a core network. The UTRAN includes one or more radio network sub-systems (RNS), each of RNSs includes one RNC and one or more Node Bs managed by the RNC. Each of Node Bs are managed by the RNC, receive information sent by the physical layer of the terminal through an

uplink, and transmit data to the terminal through a downlink. Node Bs, thus, operate as access points of the UTRAN for terminal.

A primary function of the UTRAN is to constitute and maintain a radio access bearer (RAB) for a communication between the terminal and the core network. The core network applies requirements for a quality of service of an end-to-end to the RAB, and the RAB supports the QoS requirement the core network sets.

Accordingly, by constituting and maintaining the RAB, the UTRAN can satisfy the QoS requirement of the end-to-end. The RAB service can be divided into lower conceptional Iu Bearer service and Radio Bearer service. The Iu Bearer service handles a reliable transmission of a user data in the boundary node between the UTRAN and the core network, while the radio bearer service handles a reliable transmission of a user data between the terminal and the UTRAN.

Figure 2 shows a structure of a radio protocol between a terminal which operates based on a 3GPP RAN specification and a UTRAN. The radio protocol is horizontally formed of a physical layer (PHY), a data link layer, and a network layer and is vertically divided into a control plane for transmitting a control information and a user plane for transmitting data information. The user plane is a region to which traffic information of a user such as voice or an IP packet is transmitted. The control plane is a region to which control information such as an interface of a network or maintenance and management of a call is transmitted.

In Figure 2, protocol layers can be divided into a first layer (L1), a

second layer (L2), and a third layer (L3) based on three lower layers of an open system interconnection (OSI) standard model well known in a communication system. Each layer of Figure 2 will now be described.

The first layer (L1) provides information transfer service to an upper
5 layer by using various radio transmission techniques. It is connected to an MAC (Medium Access Control) layer at the upper position through a transport channel, and data between the MAC layer and a physical layer are moved through the transport channel.

The MAC provides assignment service of an MAC parameter for
10 assigning and re-assigning a radio resource. It is connected to a radio link control layer, an upper layer, by a logical channel, and various logical channels are provided according to the kind of transmitted information. In general, when information of the control plane is transmitted, a control channel is used. When information of the user plane is transmitted, a traffic
15 channel is used.

The MAC is classified into MAC-b sublayer, MAC-d sublayer and MAC-c/sh sublayer according to the type of transport channel it manages. The MAC-b sublayer manages a broadcast channel (BCH), a transport channel handling broadcast of system information. The MAC-c/sh sublayer
20 manages a common or shared transport channel such as the FACH or a DSCH (Downlink Shared Channel) shared by multiple terminals.

In the UTRAN, the MAC-c/sh sublayer is positioned in the CRNC. Since the MAC-c/sh sublayer manages channels shared by every terminal in a cell, one MAC-c/sh sublayer exists in each cell. The MAC-d sublayer

manages a dedicated channel (DCH), a dedicated transport channel for a specific terminal. Therefore, the MAC-d sublayer is positioned at the SRNC handling management of a corresponding terminal and one MAC-d sublayer exists in each terminal.

5 The RLC layer supports reliable data transmission and performs a function of segmentation and concatenation of RLC service data unit (SDU) coming down from an upper layer.

 The RLC SDU delivered from the upper layer is adjusted in its size suitable for a processing capacity in the RLC layer, to which header
10 information is added and transmitted as a protocol data unit form to the MAC layer. The RLC layer has an RLC buffer to store RLC SDU or PDUs coming down from the upper layer.

 A broadcast/multicast control (BMC) layer schedules a cell broadcast (CB) message delivered from the core network and allows user equipments
15 positioned in a specific cell to perform a broadcast function.

 At the side of the UTRAN, the CB message delivered from the upper layer is added with information such as a message ID, a serial number or a coding scheme and transmitted as the BMC message form to the RLC layer, and transmitted to the MAC layer through the logical channel CTCH
20 (Common Traffic Channel). The logical channel CTCH is mapped with the transport channel FACH and S-CCPCH.

 A packet data convergence protocol (PDCP) layer is positioned at an upper side of the RLC layer and allows data to be transmitted through a network protocol such as an IPv4 or IPv6 to be effectively transmitted on the

radio Interface with a relatively small bandwidth. For this purpose, the PDCP layer performs a function of reducing unnecessary control information, which is called a header compression, and RFC2507 and RFC3095, a header compression technique defined in an Internet standardization group called IETF (Internet Engineering Task Force). With these methods, because the header part is allowed to transmit only essential information, less control information is transmitted, thereby reducing a quantity of data to be transmitted.

The radio resource control (RRC) layer positioned in the lowest portion of the L3 is defined only in the control plane and controls the logical channels, the transport channels, and the physical channels in relation to the setup, the reconfiguration, and the release of the RBs. The RB is a service provided by the second layer for data transmission between the terminal and the UTRAN. Setting up the RB means processes of stipulating the characteristics of a protocol layer and a channel, which are required for providing a specific service, and setting the respective detailed parameters and operation methods.

The multimedia broadcast/multicast service (MBMS) will now be described.

The MBMS is a service transmitting multimedia data such as an audio, a video or an image to a plurality of terminals by using a uni-directional point-to-multipoint bearer service. UTRAN transmits the MBMS data over a downlink common transport channel such as FACH or DSCH in order to heighten an efficiency of a radio network.

The MBMS has two types of modes of a broadcast mode and a multicast mode. Namely, the MBMS service is divided into an MBMS broadcast service and an MBMS multicast service.

5 The MBMS broadcast mode is a service transmitting multimedia data to every user located in a broadcast area. The broadcast area herein refers to an area where a broadcast service is available. One or more broadcast areas can exist in one public land mobile network (PLMN), and one or more broadcast services can be provided in one broadcast area. Further, one broadcast service can be provided to several broadcast areas.

10 The MBMS multicast mode is a service for transmitting multimedia data only to a specific user group in a multicast area. Here, the multicast area refers to an area where a multicast service is available. There can exist one or more multicast areas in one PLMN, and one or more multicast services can be provided in one multicast area. Further, one multicast service can be
15 provided to several multicast areas.

In the MBMS multicast mode, a user is required to join a multicast group for receiving a specific multicast service. Here, the multicast group refers to a user group receiving a specific multicast service, and joining herein refers to a behavior of joining to the multicast group for receiving the
20 specific multicast service.

The radio network temporary identifier (RNTI) will now be described.

The RNTI is used as identification information of a terminal while connection is maintained between the terminal and the UTRAN, including S-RNTI, D-RNTI, C-RNTI and U-RNTI.

S-RNTI (Serving RNC RNTI) is assigned by an SRNC (Serving RNC) when a connection is set up between the terminal and the UTRAN, and used as base information for the SRNC to identify a terminal.

5 D-RNTI (Drift RNTI) is assigned by a DRNC (Drift RNC) when a handover occurs between radio network controllers according to a terminal's movement.

C-RNTI (Cell RNTI) is used as information to identify a terminal in an CRNC (Controlling RNC) and given a new C-RNTI value from the CRNC when a terminal enters a new cell.

10 U-RNTI (UTRAN RNTI) consists of an SRNC identity and an S-RNTI and provides absolute identification information of a terminal in case that identification information of an SRNC managing a terminal and identification information of a terminal in the corresponding terminal can not be recognized.

When data is transmitted by using a common transport channel, an
15 MAC-c/sh layer includes C-RNTI or U-RNTI in a header of an MAC PDU and transmits it. At this time, the header of the MAC PDU also includes a UE ID type indicator informing a type of the RNTI.

One or more physical channel S-CCPCH (Secondary Common Control Physical Channel) can be provided by a cell, so that a terminal
20 desires to receive a transmission channel FACH (Forward Access Channel) or a PCH (Paging Channel), it first selects a mapped S-CCPCH channel. That is, the terminal selects a S-CCPCH channel to be received by itself by using the U-RNTI.

The conventional RNTIs are used only for the point-to-point radio

service, they serve to identify only one terminal. Thus, when the terminal receives data through the downlink common transport channel, it recognizes whether the RNTI included in the header of the MAC PDU is the same as an RNTI assigned to itself and transfers only data including the same RNTI.

5 However, the MBMS transmitting data to a plurality of terminal, that is, to a terminal group, by using the point-to-multipoint radio service on the radio, the conventional RNTI can not be used.

 First, when the conventional RNTI is used for the common transport channel for the MBMS, RNTIs of plural terminals for receiving a
10 corresponding data should be all included in the header of the MAC PDU. Then, RNTIs as many as the receiving terminals are included in the header of the MAC PDU, the header becomes fat.

 For this reason, in case of the conventional CBS service, no RNTI is included in the header of the MAC PDU to provide the point-to-multipoint
15 radio service. Instead, a message ID is included in a BMC message in an BMC layer. In this case, however, the MAC layer of the terminal can not recognize whether a received data belongs to itself, every data received over the common transport channel should be transmitted to the upper RLC and BMC layers.

20 There is another disadvantage of the message identifier. In the conventional art, the user gives the BMC layer message identifier information to be received. The terminal thereby transfers a corresponding message to the upper layer only when a message identifier of the received BMC message is identical to a message identifier selected by the user. With this

method, protection of information of a specific message data is not guaranteed. That is, because the whole message identifiers are known to the every user, it is not possible that a specific message data is received only by a specific user group or a specific message data is protected from damage or
5 distortion.

The above references are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features and/or technical background.

10

DISCLOSURE OF THE INVENTION

Therefore, an object of the present invention is to provide a multimedia service providing method in a radio mobile telecommunication system that provides a radio network temporary identifier (RNTI) suitable for MBMS service.

15

Another object of the present invention is to provide a multimedia service providing method of an universal mobile telecommunication system capable of transmitting only a specific data to an upper layer by an MAC.

20

Still another object of the present invention is to provide a multimedia service providing method in an universal mobile telecommunication system capable of assigning a radio resource, configuration and control information through an RNTI.

To achieve at least the above objects in whole or in parts, there is provided a multimedia service providing method in an universal mobile telecommunication system in which multimedia broadcast/multicast service

(MBMS) is provided to plural terminals, including: generating an identifier for a specific MBMS service; adding the generated identifier to every MBMS protocol data unit; and transferring the MBMS protocol data unit to a terminal.

Preferably, the identifier is an MBMS radio network temporary
5 identifier (RNTI).

Preferably, the identifier is generated from a radio resource control (RRC) layer.

Preferably, the RRC layer generates the identifier when a radio access bearer is established, and discards the identifier when the radio
10 access bearer is released.

Preferably, the identifier indicates a specific MBMS service or a multicast group.

Preferably, the specific MBMS service is a broadcast service or a multicast service.

15 Preferably, the identifier is included in header of an MBMS protocol data unit.

Preferably, the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

Preferably, the MBMS protocol data unit includes an indicator
20 indicating a type of the identifier.

To achieve at least these advantages in whole or in parts, there is further provided a multimedia service providing method in an universal mobile telecommunication system in which multimedia broadcast/multicast service (MBMS) is provided to a terminal group consisting of plural terminals,

including: generating an identifier for an MBMS service and assigning it to a terminal group; adding an MBMS identifier in the MBMS protocol data unit and transmitting it to the terminal group; and comparing the MBMS identifier contained in the received MBMS protocol data unit and the assigned MBMS
5 identifier and receiving the MBMS protocol data unit by each terminal.

Preferably, the MBMS identifier is an MBMS radio network temporary identifier (RNTI).

Preferably, the MBMS identifier is generated by an RRC (Radio Resource Control) layer of UTRAN.

10 Preferably, the RRC layer generates the identifier when a radio access bearer is established, and discards the identifier when the radio access bearer is released.

Preferably, the MBMS identifier is assigned by an RRC (Radio Resource Control) layer of UTRAN.

15 Preferably, the MBMS identifier is assigned to the terminal group through an RRC message.

Preferably, the MBMS identifier is included in the header of the MBMS protocol data unit.

20 Preferably, the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

Preferably, the MBMS protocol data unit includes an identifier type indicator indicating a type of the identifier.

Preferably, the identifier type indicator is included in the header of the MBMS protocol data unit.

Preferably, the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

In the multimedia service providing method in an universal mobile telecommunication system of the present invention, the MBMS data receiving
5 step includes: checking whether the MBMS identifier is included in the MBMS protocol data unit; checking whether the MBMS identifier included in the MBMS protocol data unit is identical to the previously assigned MBMS identifier if the MBMS identifier is included in the MBMS protocol data unit; removing a header from the MBMS protocol data unit if the two identifiers are
10 identical; and transferring the header-removed MBMS protocol data unit to an upper layer of a terminal.

Preferably, the terminal checks whether the MBMS identifier is included in the MBMS protocol data unit by checking whether an identifier type indicator of the MBMS protocol data unit indicates the MBMS identifier.

15 Preferably, the identifier type indicator indicates a type of the identifier included in the MBMS protocol data unit.

Preferably, if the two identifiers are not identical, the terminal discards the received MBMS protocol data unit.

The multimedia service providing method of a universal mobile
20 telecommunication system of the present invention further includes: constructing feedback information on the received MBMS data; and adding the MBMS identifier to feedback information of the MBMS data and transferring it to UTRAN by each terminal.

To achieve at least these advantages in whole or in parts, there is

further provided a multimedia service providing method in an universal mobile telecommunication system in which multimedia broadcast/multicast service (MBMS) is provided to a terminal group consisting of plural terminals, including: transferring plural physical channel information to a terminal group;
5 assigning an MBMS identifier to terminals which are to receive an MBMS data; and obtaining information of a specific physical channel indicated by the MBMS identifier from the plural physical channel information and receiving the MBMS data.

Preferably, the MBMS identifier is an MBMS radio network temporary
10 identifier (RNTI).

Preferably, the MBMS identifier indicates the specific physical channel by indicating the number of the specific physical channel included in the plural physical channel information.

Preferably, the physical channel is a secondary common control
15 physical channel transmitting MBMS data.

Preferably, information of the physical channel is a list of plural channels transmitting MBMS data and a parameter indicating a channel code of the physical channel, a scrambling code, a size of a data to be transmitted, a time interval at which data is transmitted, a channel coding, and a type of a
20 transport channel mapped with a corresponding physical channel and a logical channel.

In the multimedia service providing method of a universal mobile telecommunication system of the present invention, the MBMS data receiving step includes: selecting a specific physical channel indicated by the MBMS

identifier among the plural physical channels included in the plural physical channel information; obtaining information on the selected physical channel from the plural physical channel information; establishing the selected physical channel by each terminal; and receiving the MBMS data through the
5 selected physical channel.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and
10 advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements
15 wherein:

Figure 1 illustrates a network structure of a general UMTS system;

Figure 2 illustrates a structure of a radio protocol between a terminal and UTRAN on the basis of a 3GPP radio access network standard;

Figure 3 is a signal flow chart showing a process of generating
20 MBMS RNTI in UTRAN when an MBMS RAB is generated for an MBMS service in accordance with the present invention;

Figure 4 is a signal flow chart showing a process of assigning MBMS RNTI to a terminal which is to receive an MBMS service after an MBMS RAB and an MBMS RNTI are generated in accordance with the present invention;

Figure 5 is a signal flow chart showing a process of receiving a data of a corresponding MBMS service by a terminal which has been assigned the MBMS RNTI in accordance with the present invention;

Figure 6 is a signal flow chart showing a process of discarding the
5 MBMS RNTI assigned to a terminal by UTRAN in accordance with the present invention;

Figure 7 is a signal flow chart showing a process of discarding the MBMS RNTI by UTRAN when the MBMS RAB for an MBMS service is discarded in accordance with the present invention; and

10 Figure 8 is a signal flow chart showing a process of selecting a physical channel for receiving a data of a corresponding MBMS service by a terminal through allocation of MBMS RNTI in accordance with the present invention.

15 **MODES FOR CARRYING OUT THE PREFERRED EMBODIMENTS**

The present invention is implemented in such a mobile communication system as the UMTS (universal mobile telecommunications system), which has been recently developed by 3GPP. However, without being limited thereto, the present invention can be also applied to a
20 communication system operated with different standards. Preferred embodiments of the present invention will now be described.

The present invention proposes an MBMS RNTI (MBMS Radio Network Temporary Identifier) used when MBMS service-related information is given and taken between UTRAN and a terminal or between nodes in

UTRAN in case that UTRAN provides an MBMS service, in which the MBMS RNTI serves as a identifier for a specific MBMS service or a multicast group.

Characteristics of the MBMS RNTI

5 The MBMS RNTI is added as header information of an MBMS data transmitted to a user plane of a radio protocol. Especially, the MBMS RNTI can be included in an MAC header. For example, when MBMS data is transferred to a terminal through a downlink common transport channel such as FACH or DSCH, the MBMS RNTI is included in the MAC header so that
10 the MAC layer that is responsible for MBMS can recognize whether the received MBMS data belongs to the MAC layer itself.

 In both the broadcast mode and the multicast mode, MBMS RNTI is used as an identifier indicating a specific MBMS service provided in one RNS.

 In the multicast mode, MBMS RNTI is also used as an identifier for
15 indicating a group of users receiving a specific multicast service in one RNS. In other words, MBMS RNTI corresponds to an identifier indicating a set of users who receive a service from a specific RNS among users belonging to a multicast group.

 MBMS RNTI is generated by the UTRAN when an MBMS RAB is set
20 up for an MBMS service, and when the MBMS RAB is released, the MBMS RNTI is discarded. The MBMS RAB refers to a radio access bearer set for a specific MBMS service.

 MBMS RNTI is managed by the CRNC, and an arbitrary MBMS RNTI is used to identify a specific MBMS service only in a pertinent CRNC.

MBMS RNTI is included in the MAC header of an MBMS data when the data is transmitted, for which the RRC layer of UTRAN informs the MAC-c/sh sub-layer of the UTRAN, the MAC sub-layer that is responsible for MBMS in the UTRAN, of an MBMS RNTI value for a specific MBMS service.

5 In addition, the RRC layer of UTRAN informs the RRC layer of a terminal of the MBMS RNTI value by using an RRC message. At this time, RRC layers of a plurality of terminals desired to receive the specific MBMS service are all assigned the MBMS RNTI value from the RRC layer of UTRAN.

10 Thereafter, the RRC layers of the terminals desired to receive the specific MBMS service informs the MAC-c/sh sub-layer, the MAC sub-layer that is responsible for MBMS in the terminal, of the received MBMS RNTI value.

Upon receiving the MBMS RNTI value from the RRC layer of UTRAN,
15 the MAC-c/sh sub-layer of UTRAN stores the received MBMS RNTI value. Thereafter, the MAC-c/sh sublayer of UTRAN includes the stored MBMS RNTI value in a header of an MAC PDU for a corresponding MBMS service. At this time, an identifier type indicator indicating that a type of the RNTI is the MBMS RNTI is also included in the header of the MAC PDU. The
20 identifier type indicator informs what kind of RNTI is included in a corresponding MAC PDU.

After receiving the MBMS RNTI value from the RRC layer of the terminal, the MAC-c/sh sub-layer of the terminal stores it. If the header of the received MAC PDU includes a terminal identifier type indicator, the MAC-c/sh

sub-layer of the terminal recognizes what the terminal identifier type indicator indicates.

If the terminal identifier type indicator indicates MBMS RNTI, the MAC-c/sh sub-layer of the terminal compares MBMS RNTI stored in the MAC-c/sh sub-layer itself and MBMS RNTI included in the header of the received MAC PDU. If the two MBMS RNTI values are the same with each other, the MAC-c/sh sub-layer of the terminal transfers the corresponding data to the upper layer of the terminal.

10 **Generation/assignment/discard process of the MBMS RNTI**

The following process is applied both to the broadcast mode and the multicast mode.

Figure 3 shows a process of generating MBMS RNTI, in which UTRAN generates MBMS RNTI when MBMS RAB is generated for an arbitrary MBMS service.

Referring to Figure 4, in case that MBMS RAB is generated for an MBMS service, UTRAN RRC generates MBMS RNTI for an MBMS service (S1), and transfers MBMS RNTI for the corresponding MBMS service to the UTRAN MAC-c/sh (S2). Thus, UTRAN MAC-c/sh stores the MBMS RNTI (S3).

Figure 4 shows a process of assigning MBMS RNTI to a terminal, in which after MBMS RAB and MBMS RNTI are generated, MBMS RNTI is assigned to a terminal for receiving a corresponding MBMS service.

As shown in Figure 5, the UTRAN RRC transfers MBMS RNTI for an

MBMS service to a terminal RRC through an RRC message (S4), the terminal RRC transfers MBMS RNTI to a terminal MAC-c/sh (S5). The terminal MAC-c/sh stores the MBMS RNTI (S6), and then the terminal RRC informs the UTRAN RRC that MBMS RNTI has been completely assigned
5 through an RRC message (S7). Thereafter, the terminal can receive MBMS data for the corresponding MBMS service.

Figure 5 shows a process of transmitting MBMS data, in which a terminal assigned MBMS RNTI receives data of a corresponding MBMS service.

10 If an upper layer receives a data (MAC PDU) for a corresponding MBMS service, UTRAN MAC-c/sh includes an identifier type indicator and the stored MBMS RNTI in a header of a corresponding MAC PDU (S10). The identifier type indicator indicates that a type of included RNTI is MBMS RNTI. UTRAN MAC-c/sh transfers an MAC PDU to a terminal MAC-c/sh by using a
15 service of a lower layer (S11).

If the identifier type indicator of a header of the MAC PDU received by the terminal MAC-c/sh indicates MBMS RNTI, the terminal MAC-c/sh compares MBMS RNTI of the received MAC PDU with the stored MBMS RNTI (S12). If the two RNTI values are the same with each other, the
20 terminal MAC-c/sh removes the MAC header from the received MAC PDU, and then transfers the MBMS data included in the MAC PDU to an upper layer (S13).

Figure 6 shows a process of discarding MBMS RNTI stored in a terminal, in which UTRAN discards MBMS RNTI which has been assigned to

the terminal.

UTRAN RRC requests a terminal RRC through an RRC message to discard MBMS RNTI for a corresponding MBMS service (S14). The terminal RRC requests the terminal MAC-c/sh to discard MTMS RNTI according to the discard request (S15). The terminal MAC-c/sh discards the stored MBMS RNTI, and the terminal RRC informs the UTRAN RRC through an RRC message that the MBMS RNTI has been discarded (S17). Thereafter, the terminal can not receive MBMS data for the corresponding MBMS service.

Figure 7 shows a process of discarding MBMS RNTI, in which UTRAN discards MBMS RNTI when MBMS RAB for an arbitrary MBMS service is discarded.

If there are one or more terminals storing corresponding MBMS RNTI, UTRAN can proceed with the process of Figure 7 and the process of Figure 8 together.

UTRAN RRC determines discard of MBMS RNTI for a corresponding MBMS service in case that MBMS RAB is released for an MBMS service (S20), and requests the UTRAN MAC-c/sh to discard MBMS RNTI for the corresponding MBMS service (S21). Thus, UTRAN MAC-c/sh discards the MBMS RNTI according to the RNTI discard request.

20

Radio resource assignment through MBMS RNTI

MBMS RNTI performs a function of indicating a radio resource used for a specific MBMS service. UTRAN RRC informs the terminal RRC of channel information through system information of BCH. The channel

information refers to a parameter such as the number of a physical channel being provided for service in a corresponding cell, a channel code of each physical channel, a scrambling code, a size of data to be transmitted, time interval for data transmission, a channel coding, a type of transport channel and a logical channel mapped with a corresponding physical channel, or the like.

In the present invention, a specific MBMS RNTI indicates the number of the physical channel transmitting a data of a specific MBMS service. By doing that, it is not necessary for UTRAN to transmit channel information for MBMS data transmission to corresponding terminals whenever MBMS RNTI is assigned.

In detail, when the MBMS service is transferred through the transport channel FACH and the physical channel S-CCPCH, UTRAN selects an S-CCPCH channel for transmitting a data of the corresponding MBMS service through the following equation (1):

The number of S-CCPCH = MBMS RNTI modulo K ----- (1)
wherein the value 'K' corresponds to the number of S-CCPCH with which FACH channel transmitting MBMS data in a corresponding cell is mapped and the number of S-CCPCH corresponds to a list order of S-CCPCH channels existing in system information of the corresponding cell.

The terminal can be aware of channel information corresponding to the number of S-CCPCH through the S-CCPCH channel list of the system information transferred through the BCH channel. Accordingly, the terminal calculates the number of S-CCPCH by substituting first assigned MBMS

RNTI to equation (1) and obtains information of the calculated S-CCPCH channel from the system information, thereby receiving transmitted MBMS data.

Figure 8 shows a process of allocating a physical channel through
5 MTMS RNTI, in which a terminal selects a physical channel for receiving a data of a corresponding MBMS service through MBMS RNTI assignment.

UTRAN RRC sets up a lower layer for transmission of MBMS data (S23). That is, UTRAN RRC allows a physical layer, MAC, RLC and PDCP layer of UTRAN to set a parameter such as the number of the physical
10 channel S-CCPCH provided for service in a corresponding cell, a channel code and a scrambling code of each physical channel, a size of a data to be transmitted, a time interval for data transmission, a channel coding and a type of transport channel and a logical channel mapped with a corresponding physical channel. Through this process, the physical S-CCPCH transmitting a
15 MBMS data is set up.

UTRAN RRC transmits channel information to the RRC of a terminal through system information of BCH (S24). The channel information refers to the parameter such as the number of the physical channel provided for service in a corresponding cell, a channel code and a scrambling code of
20 each physical channel, a size of a data to be transmitted, a time interval for data transmission, a channel coding and a type of transport channel and a logical channel mapped with a corresponding physical channel.

The terminal RRC stores the physical channel information (S25), and the UTRAN assigns MBMS RNTI to a corresponding terminal through the

MBMS RNTI assignment process (S26).

The terminal RRC obtain information on the physical channel S-CCPCH indicated by the MBMS RNTI and a transport channel and a logical channel mapped with the channel from the physical channel information (S27). That is, the terminal RRC obtains the parameter such as a channel
5 code and a scrambling code of the physical channel S-CCPCH transmitting a data of the specific MBMS service, a size of a data to be transmitted, a time interval for data transmission, a channel coding and a type of transport channel and a logical channel mapped with a corresponding physical channel.

10 The terminal RRC sets a lower layer of the terminal by using the obtained channel information (S28). That is, a physical layer, MAC, RLC and PDCP layer of the terminal are set by using the obtained channel information. Through this process, the physical S-CCPCH for receiving a data of the corresponding MBMS service is set. Then, the terminal can receive the data
15 of the MBMS service through the transport channel FACH.

Transmission control information using MBMS RNTI

The RRC layer of MBMS controls the transport channel and the physical channel with respect to set-up, re-set-up and release of RB to which
20 MBMS RAB is mapped.

In order to control the set-up/re-set-up and termination, an RRC message is exchanged between RNC and UE. That is, MBMS RNTI is inserted into the RRC message for a specific MBMS service to identify a specific MBMS service.

For example, an RRC of a terminal which has received a data of a specific MBMS service transfers feedback information on an MBMS data to the RRC of UTRAN, MBMS RNTI for a corresponding MBMS service is included in the feedback information to identify the corresponding feedback
5 information. That is, the specific MBMS RNTI is included in the RRC message transmitting the feedback information.

As so far described, the multimedia service providing method of universal mobile telecommunication system of the present invention has the following advantages.

10 That is, when UTRAN provides an MBMS service, MBMS RNTI is used to give and take MBMS service-related information between UTRAN and the terminal or between nodes in UTRAN. Therefore, not only does a user group receiving an MBMS data can be easily recognized but also a data of a specific MBMS service can be easily recognized.

15 In addition, when data is transmitted to a plurality of terminals, that is, to a terminal group, by using a point-to-multipoint radio service, specific groups receiving the data can be discernible. Thus, only MBMS data corresponding to a corresponding terminal can be transferred from the MAC layer to the upper layer.

20 Moreover, MBMS RNTI indicates plural terminals with one identification information, so that the length of a header can be reduced compared with the use of RNTI as in the conventional art.

Furthermore, the use of an identifier temporarily assigned in UTRAN obtains an effect of protecting information of MBMS data compared with the

use of a fixed message identifier.

Also, because MBMS RNTI indicates a specific radio resource, a radio resource can be automatically assigned to plural terminals even without an assignment control message, and thus, complexity of scheduling of MBMS data transmission can be reduced.

The foregoing embodiments and advantages are merely exemplary and are not to be construed as limiting the present invention. The present teaching can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art. In the claims, means-plus-function clauses are intended to cover the structure described herein as performing the recited function and not only structural equivalents but also equivalent structures.

15

CLAIMS

1. A multimedia service providing method in a radio mobile communication system that provides a multimedia broadcast/multicast service (MBMS) to a plurality of terminals, comprising:

generating an identifier for a specific MBMS service;
adding the generated identifier to every MBMS protocol data unit;
and

transferring the MBMS protocol data unit to a terminal.

10

2. The method of claim 1, wherein the identifier is an MBMS radio network temporary identifier (RNTI).

3. The method of claim 1, wherein the identifier is generated from a radio resource control (RRC) layer.

15

4. The method of claim 3, wherein the RRC layer generates the identifier when a radio access bearer is established, and discards the identifier when the radio access bearer is released.

20

5. The method of claim 1, wherein the identifier indicates a specific MBMS service or a multicast group.

6. The method of claim 5, wherein the specific MBMS service is

a broadcast service or a multicast service.

7. The method of claim 1, wherein the identifier is included in header of an MBMS protocol data unit.

5

8. The method of claim 7, wherein the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

10

9. The method of claim 1, wherein the MBMS protocol data unit includes an indicator indicating a type of the identifier.

15

10. A multimedia service providing method in a radio mobile communication system in which multimedia broadcast/multicast service (MBMS) is provided to a terminal group consisting of plural terminals, comprising:

generating an identifier for an MBMS service and assigning it to a terminal group;

20

adding an MBMS identifier in the MBMS protocol data unit and transmitting it to the terminal group; and

comparing the MBMS identifier contained in the received MBMS protocol data unit and the assigned MBMS identifier and receiving the MBMS protocol data unit by each terminal.

11. The method of claim 10, wherein the MBMS identifier is an MBMS radio network temporary identifier (RNTI).

12. The method of claim 10, wherein the MBMS identifier is
5 generated by an RRC (Radio Resource Control) layer of UTRAN.

13. The method of claim 12, wherein the RRC layer generates the identifier when a radio access bearer is established, and discards the identifier when the radio access bearer is released.

10

14. The method of claim 10, wherein the MBMS identifier is assigned by an RRC (Radio Resource Control) layer of UTRAN.

15. The method of claim 14, wherein the MBMS identifier is
15 assigned to the terminal group through an RRC message.

16. The method of claim 10, wherein the MBMS identifier is included in the header of the MBMS protocol data unit.

20 17. The method of claim 16, wherein the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

18. The method of claim 10, wherein the MBMS protocol data

unit includes an identifier type indicator indicating a type of the identifier.

19. The method of claim 18, wherein the identifier type indicator is included in the header of the MBMS protocol data unit.

5

20. The method of claim 19, wherein the MBMS protocol data unit is an MAC protocol data unit and the header is a header of the MAC protocol data unit.

10 21. The method of claim 10, wherein the MBMS data receiving step comprises:

checking whether the MBMS identifier is included in the MBMS protocol data unit;

checking whether the MBMS identifier included in the MBMS protocol data unit is identical to the previously assigned MBMS identifier if the MBMS identifier is included in the MBMS protocol data unit;

removing a header from the MBMS protocol data unit if the two identifiers are identical; and

transferring the header-removed MBMS protocol data unit to an upper layer of a terminal.

22. The method of claim 21, wherein the terminal checks whether the MBMS identifier is included in the MBMS protocol data unit by checking whether an identifier type indicator of the MBMS protocol data unit

indicates the MBMS identifier.

23. The method of claim 22, wherein the identifier type indicator indicates a type of the identifier included in the MBMS protocol data unit.

5

24. The method of claim 21, wherein if the two identifiers are not identical, the terminal discards the received MBMS protocol data unit.

25. The method of claim 21 further comprising:
10 constructing feedback information on the received MBMS data; and
adding the MBMS identifier to feedback information of the MBMS data and transferring it to UTRAN by each terminal.

26. A multimedia service providing method in a universal mobile
15 telecommunication system in which multimedia broadcast/multicast service (MBMS) is provided to a terminal group consisting of plural terminals, comprising:

transferring plural physical channel information to a terminal group;
assigning an MBMS identifier to terminals which are to receive an
20 MBMS data; and

obtaining information of a specific physical channel indicated by the MBMS identifier from the plural physical channel information and receiving the MBMS data.

27. The method of claim 26, wherein the MBMS identifier is an MBMS radio network temporary identifier (RNTI).

28. The method of claim 26, wherein the MBMS identifier
5 indicates the specific physical channel by indicating the number of the specific physical channel included in the plural physical channel information.

29. The method of claim 26, wherein the physical channel is a secondary common control physical channel transmitting MBMS data.

10

30. The method of claim 26, wherein information of the physical channel is a list of plural channels transmitting MBMS data and a parameter indicating a channel code of the physical channel, a scrambling code, a size of a data to be transmitted, a time interval at which data is transmitted, a
15 channel coding, and a type of a transport channel mapped with a corresponding physical channel and a logical channel.

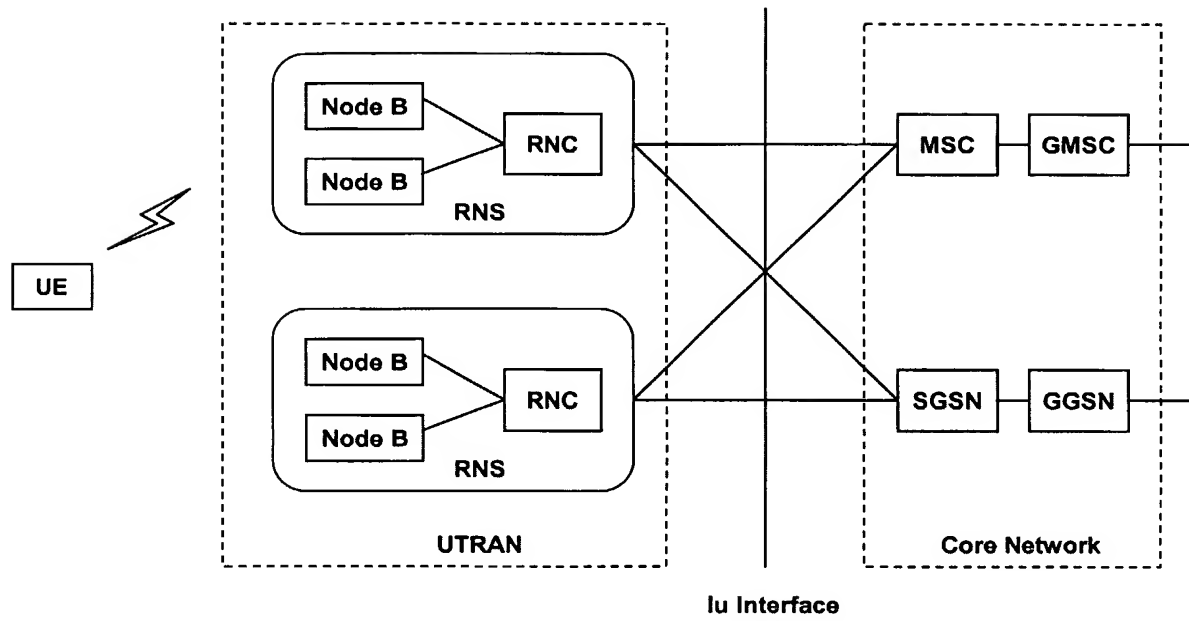
31. The method of claim 26, wherein the MBMS data receiving step comprises:

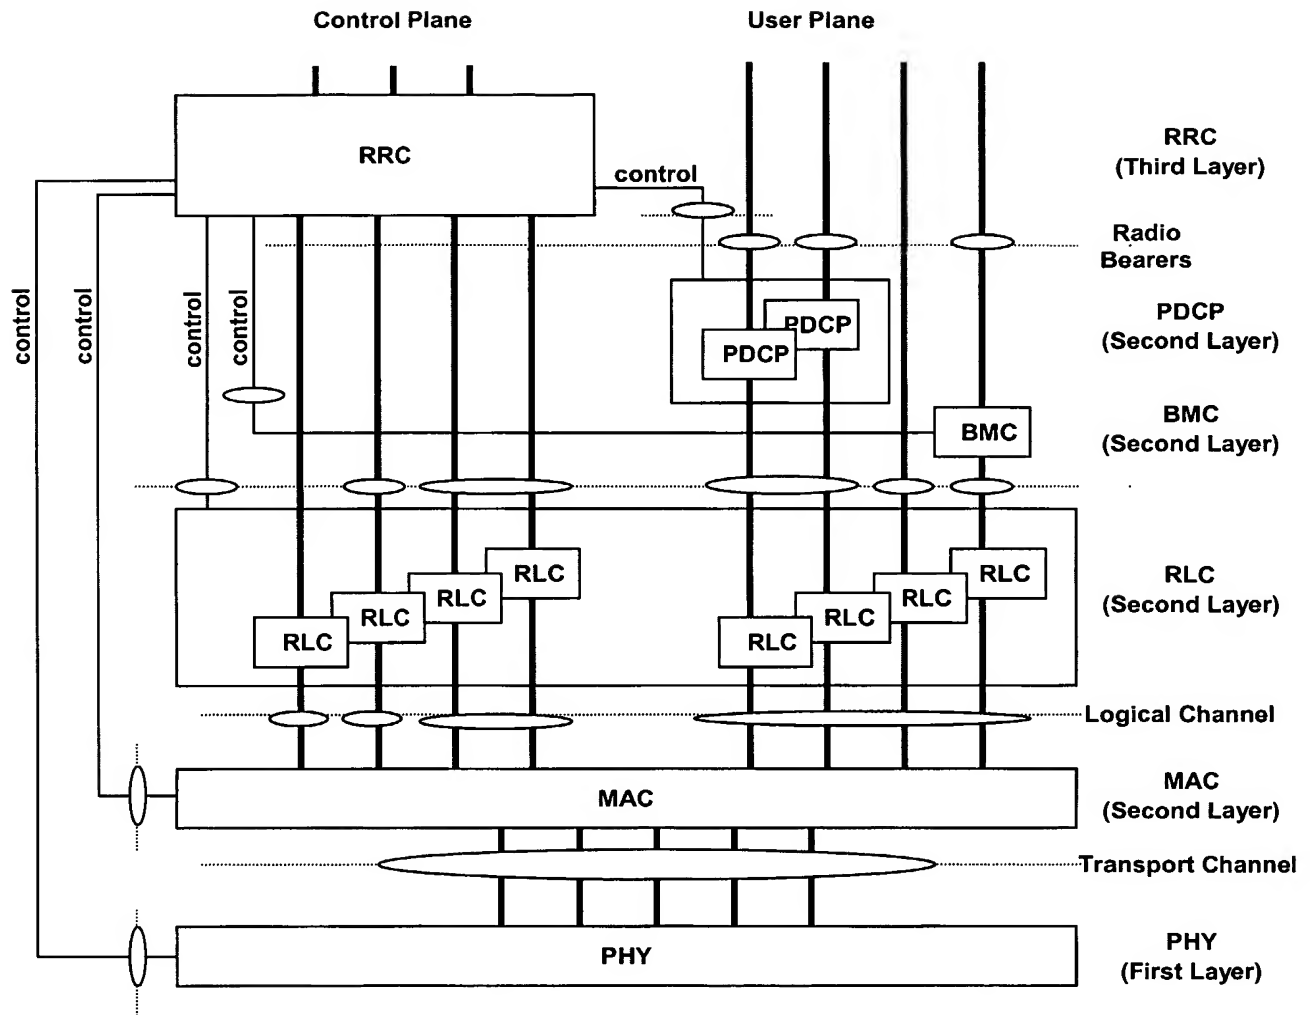
20 selecting a specific physical channel indicated by the MBMS identifier among the plural physical channels included in the plural physical channel information;

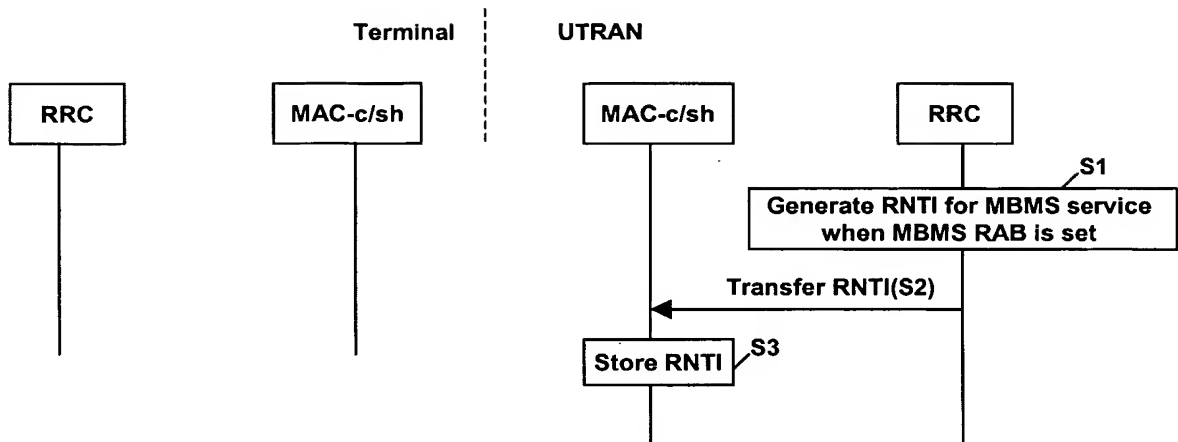
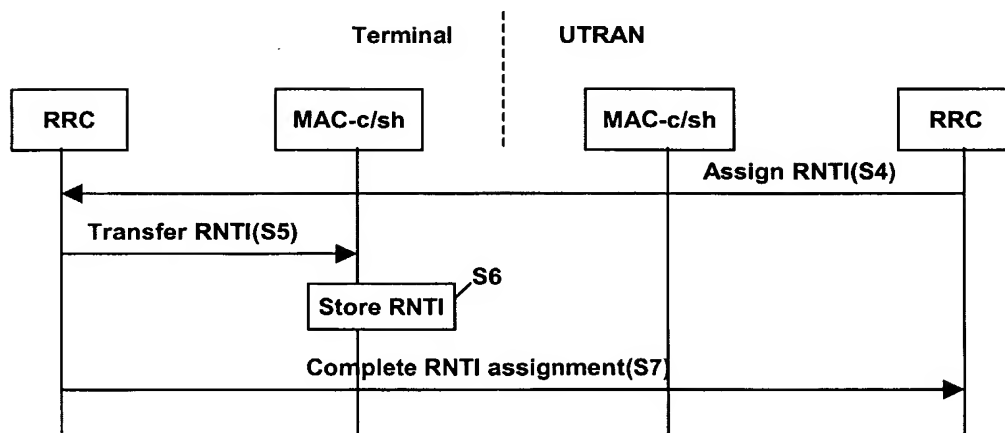
obtaining information on the selected physical channel from the plural physical channel information;

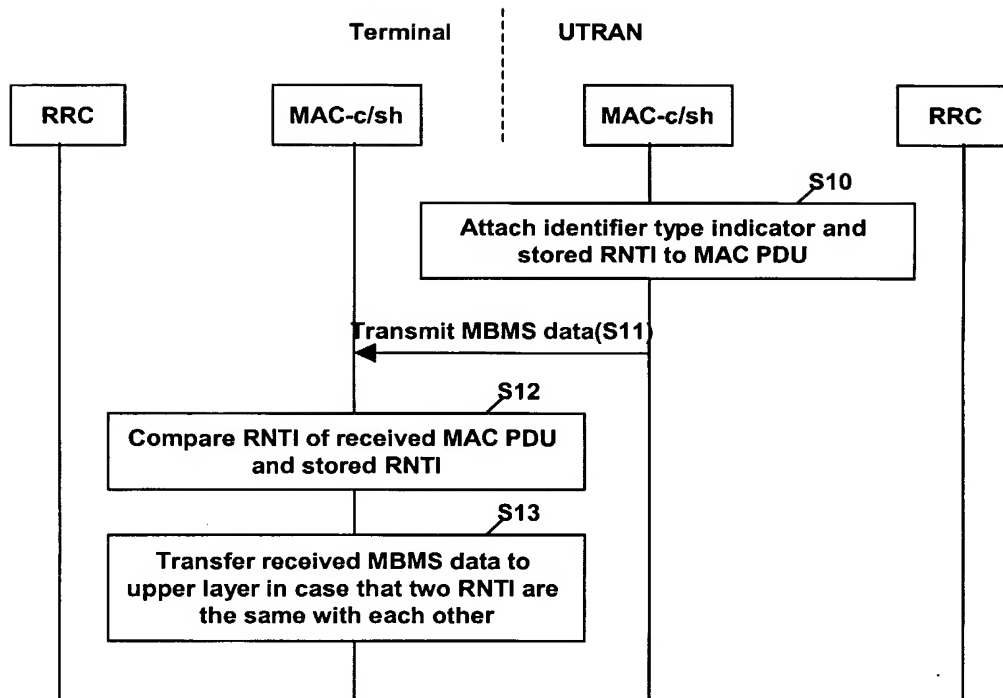
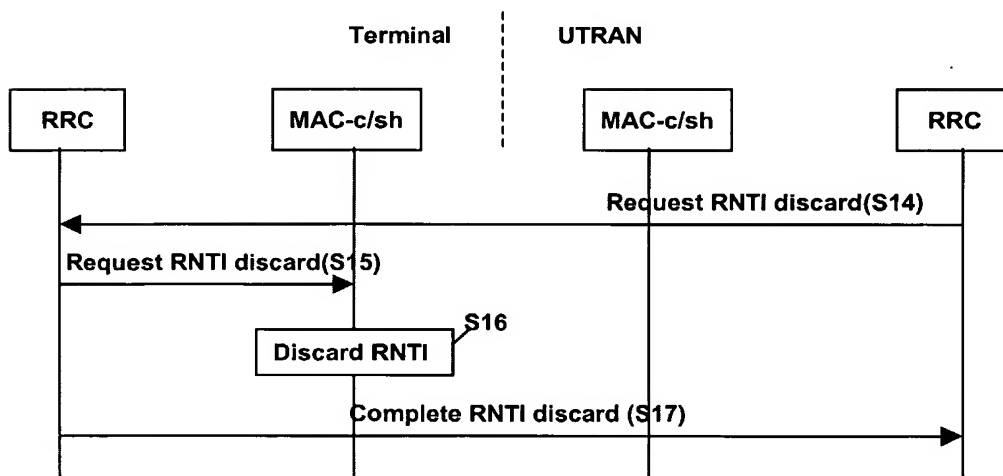
establishing the selected physical channel by each terminal; and
receiving the MBMS data through the selected physical channel._

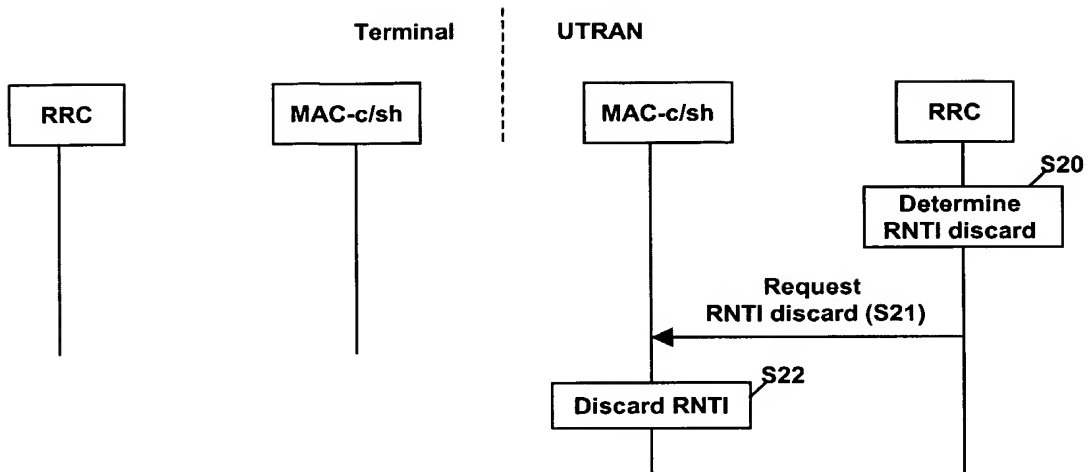
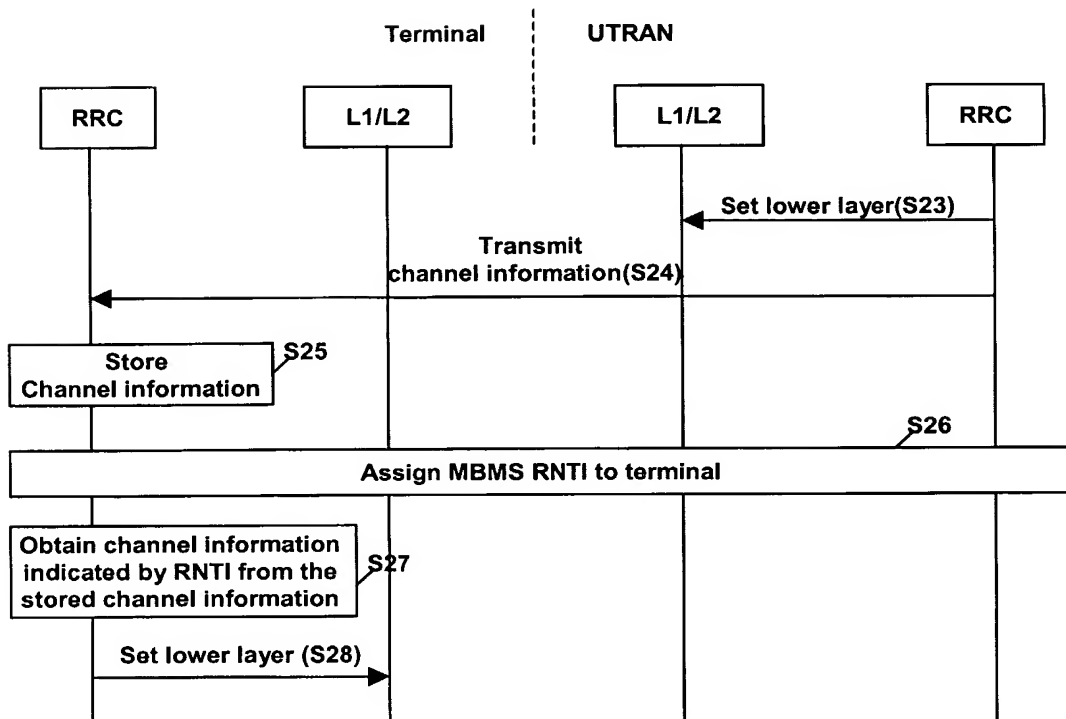
^{1/5}
FIG.1



2/5
FIG.2

3/5
FIG.3**FIG.4**

4/5
FIG.5**FIG.6**

5/5
FIG.7**FIG.8**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR03/01228

A. CLASSIFICATION OF SUBJECT MATTER**IPC7 H04B 7/26**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B H04L H04M H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 Korean Patents and applications for inventions since 1975, Korean Utility models and applications for Utility models since 1975, IEEE technical document since 1980

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"Multicasting in UMTS", Palat, S.K.; Weerasekera, I.N.; Casati, A., 3G Mobile Communication Technologies 2002(Third International Conference on 8-10 May. 2002), Page(s): 96 -101 See whole the document	1-31
E/A	KR 2003-0069365 A (SAMSUNG ELECTRONICS) 27 Aug. 2003 See whole the document	1,10,26
A	EP 1077539 A1 (TOKYO SHIBAURA ELECTRIC) 21 Feb. 2001 See abstract and figures	1,10,26

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

06 OCTOBER 2003 (06.10.2003)

Date of mailing of the international search report

07 OCTOBER 2003 (07.10.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
 920 Dunsan-dong, Seo-gu, Daejeon 302-701,
 Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Yong Jae

Telephone No. 82-42-481-5716



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR03/01228

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 2003-0069365 A	27 Aug. 2003	NONE	
EP 1077539 A1	21 Feb. 2001	JP 2001053675 A2	23-02-2001